




HYT ENGINEERING COMPANY PVT. LTD.

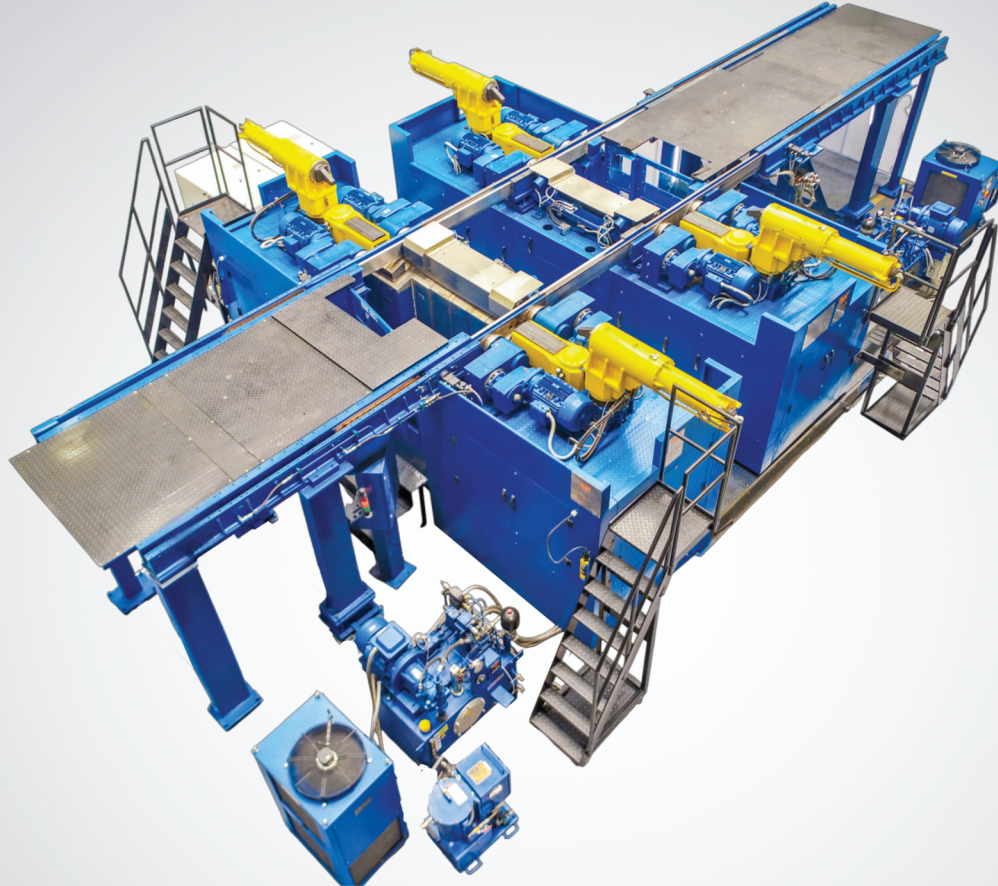

## YUL - 12T

### CNC TANDEM UNDERFLOOR WHEEL LATHE

CNC Tandem Underfloor Wheel Lathe is a combination of two CNC Underfloor wheel lathes for simultaneous re-profiling of new or worn-out two-wheelsets of one bogie of railway vehicles in situ. It is also capable of machining brake discs assembled on wheelsets of rolling stock. One of the machine in Tandem configuration is fixed and other machine can be either movable or fixed.

High degree of automation like automatic loading & unloading, automatic wheel profile & diameter measurement, suggestion of optimum depth of cut to restore profile, automatic machining process and easy to understand interactive HMI screens enables machine very easy to operate.

Automatic synchronised lifting of each wheelset by 4 drive rollers to ensure correct alignment of wheelset with respect to machine centre line. Roller in individual follow up mode after

application of jacks and hold down claws to the axle / bearing boxes. This ensures continuous drive roller contact to wheelset during machining operations.

Dedicated control software with customised HMI Screens takes care of various safety measures for easy & safe operations as well as displays fault messages. Provision of remote maintenance support from HYT Headquarter is also available. Easy and quick access to parts requiring maintenance attention results in faster maintenance of machine.

This machine integrates both Industry 4.0 and Industry 5.0 features.



## LEADING PARAMETER

### TECHNICAL DATA OF MACHINE

|                                           |   |                                             |
|-------------------------------------------|---|---------------------------------------------|
| ○ Main Motor Capacity                     | : | 4 motors of 15 kW capacity for each machine |
| ○ Cutting Speed while Profiling           | : | 20 to 120 m/min (Optional 20-300 m/min)     |
| ○ Tool Post Feed for Wheel Profiling      | : | 0.1 to 2.5 mm/rev                           |
| ○ Tool Post Rapid Speed for Both Axes     | : | 3000 mm/min                                 |
| ○ Max. Chip Cross Section while Profiling | : | 10 mm <sup>2</sup>                          |
| ○ Supply Voltage                          | : | 3Ph, 415VAC, 50 Hz**                        |

\*\* Special electrical supply can be considered, if required.

### WHEELSET DATA FOR MACHINING

|                       |   |               |
|-----------------------|---|---------------|
| ○ Track Gauge         | : | As required   |
| ○ Max. Tread Diameter | : | 1500 mm*      |
| ○ Min. Tread Diameter | : | 540 mm*       |
| ○ Wheel Width         | : | 75 to 155 mm* |
| ○ Max. Axle Load      | : | 300/400 kN    |

\*Depends on Track Gauge

The parameters are for standard specification. However, suitable models for Locomotives, Metros, Trams and other Lightweight Vehicles are available.

### ACCURACIES OF WHEELSET (WHEEL PROFILING)

|                                                                          |   |             |
|--------------------------------------------------------------------------|---|-------------|
| ○ Difference in diameter of Both Wheels                                  | : | <0.10 mm    |
| ○ Difference in diameter of 4 wheels in one bogie :                      | : | <0.3 mm     |
| ○ Accuracy of Wheel Profile when<br>Compared with Standard Profile Gauge | : | <0.2 mm     |
| ○ Radial Runout of Wheel                                                 | : | <0.10 mm    |
| ○ Axial Runout of Wheel                                                  | : | <0.15 mm    |
| ○ Profile Surface Finish                                                 | : | <12.5 µm Ra |

## UNIQUE PROPOSITION

- Re-Profiling time reduced by upto 50%
- One of the machine is fixed and other machine is movable to accommodate varying Bogie wheelbase
- CNC System of both the machines communicate with each other.
- Data Exchange between two machine for enhance accuracies.
- Load-bearing structures are made from high-strength, close-grained cast iron for stability and efficient vibration damping.
- System for measuring wheel profile and diameter to optimize cutting depth economically.
- Individual Jack and hold-down device for securing axle/bearing boxes.
- Hardened and ground box guideways for Tool Carriages for maximum rigidity.
- Quick change tool for wheel profiling and disc brake machining.
- Machine Enclosure for Operator Protection.
- Heavy-duty chip conveyor & chip Shredder / crusher for effective evacuation of chips.
- Shunter interlocking provision with machine controls.
- Remote office as an optional accessory.

## OTHER PRODUCTS

CNC Tandem Underfloor Wheel Lathe | CNC Vertical Turning & Boring Machine | CNC Surface (Above floor) Wheel Lathe  
CNC Axle Journal Turning & Burnishing Lathe | CNC Portal Wheel Lathe | CNC Axle Turning Lathe

### HYT ENGINEERING COMPANY PVT. LTD.

Solutions For Rolling Stock Production & Maintenance



Plot No. 29/10, 29/10/1, 29/10/2, D - II Block, MIDC, Chinchwad,  
Pune - 411 019, Maharashtra, India. Ph: +91 20 66343900/06

[www.hytengineering.com](http://www.hytengineering.com) | [info@hytengineering.com](mailto:info@hytengineering.com)

